

# Technical Data Sheet

## AP62KM-I



Improved heat and humidity resistance and improved image stability. NIR scannable.  
Produced without using Bisphenol A.

### Paper Properties

Item	Unit	Value	Test method
Basis Weight	g/m <sup>2</sup>	75.0±5.0	ISO 536
Thickness	µm	83±5	ISO 534
Moisture	%	6.0±1.0	ISO 287
Smoothness, Bekk	s	min. 350	ISO 5627
ISO-Brightness	%	min. 85	ISO 2470:1999
Tensile strength (MD)	kN/m	min. 4.4	ISO 1924-3
Tensile strength (CD)	kN/m	min. 2.2	ISO 1924-3
Tear strength (MD)	mN	min. 330	ISO 1974
Tear strength (CD)	mN	min. 370	ISO 1974



### Image Properties

Item	Unit	Value	Test method
Image color	-	black	
Dynamic sensitivity	OD	1.28±0.03	23.2 mJ/mm <sup>2</sup>
Maximum density	OD	1.33±0.05	

### Stability Properties

Item	Unit	Value	Circumstances
<b>Heat resistance:</b>			<b>60 °C, 24 h</b>
Background	OD	max. 0.10	
Image loss	OD	max. 10%	
<b>Humidity resistance:</b>			<b>40 °C, 90 % RH, 24 h</b>
Background	OD	max. 0.10	
Image loss	OD	max. 10%	
<b>Light resistance:</b>			<b>5000 lux, 100 h</b>
Background	OD	max. 0.20	
Image loss	OD	max. 10%	
<b>Stability of image &amp; printability</b>		10 years	<b>correct storage for thermal papers</b>

### Examples of Color Development Graphs

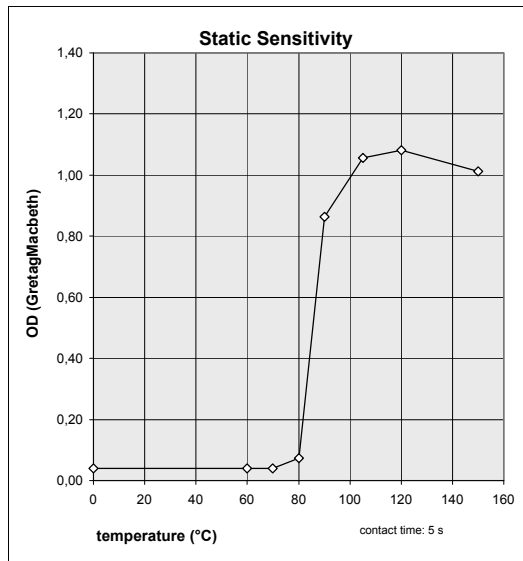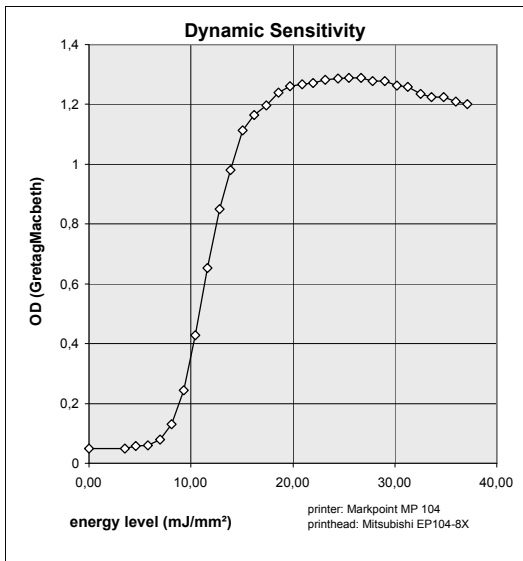

Jujo Thermal Ltd.  
P.O. Box 92  
FI-27501 Kauttua, Finland

Tel. +358 (0)10 303 200  
Fax +358 (0)10 303 2419  
www.jujothermal.com

Domicile: Eura  
Business ID: 0842018-1

THE SAFE SOLUTION